

B6134

Flame retardant - Schwerentflammbar - Ignifuge - Ignífugo - Vlamvertragend



Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande - Otros colores bajo pedido - Andere kleuren op aanvraag.



1001 3001 3018 5007 6001 7071
300 cm 300 cm 300 cm 300 cm 300 cm 300 cm



7999 9002
300 cm 300 cm

Technical specifications

Technische Daten - Données techniques - Datos técnicos - Technische specificaties

	B6000	B6134 Flame retardant	P6819 Print quality	P6825 Print quality	P6850 Print quality Block out
Total Weight - DIN ISO 2286/2:1998 Gesamtgewicht - Poids total - Peso total - Totaal gewicht	900 g/m²	900 g/m²	900 g/m²	900 g/m²	950 g/m²
Composition Zusammensetzung - Composition - Composición - Samenstelling	PES + PVC	PES + PVC	PES + PVC	PES + PVC	PES + PVC
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe - Tissu - Tejido - Weefsel	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex
Lacquering Lackierung - Laquage - Tipo lacado - Lacquering	Top: glossy Back: glossy	Top: glossy Back: glossy	Top: dull Back: dull	Top: glossy Back: glossy	Top: dull Back: dull
Breaking Strength (Warp / Weft) - EN ISO 1421/1:1998 Höchstzugkraft - Résistance à la déchirure - Resistencia urdimbre - Treksterkte	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft - Résistance à la déchirure - Resistencia urdimbre - Scheurweerstand	600 N 500 N	600 N 500 N	600 N 500 N	600 N 500 N	600 N 500 N
Adhesion - EN ISO 2411:2009 Haftung - Adhérence - Adhesión - Hechting	100 N/5cm	120 N/5cm	100 N/5cm	100 N/5cm	100 N/5cm
Temperature Resistance - EN 1876/1:1998 Temperatursbeständigkeit - Tenue à la température - Resistencia térmica - Temperatuursbestendigheid	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid - Tenue à la lumière - Solidez color - Lichtechtheit	7-8	7-8	7-8	7-8	7-8
Fire Behaviour Brennverhalten - Reaction au feu - Resistencia al fuego - Brandgedrag	(ISO 3795 1989) < 100 mm/min	M2 (NF P 92 507:2004) B1 (DIN 4102:1998)	(ISO 3795 1989) < 100 mm/min	(ISO 3795 1989) < 100 mm/min	(ISO 3795 1989) < 100 mm/min
Reaction to Fire - EN 13501-1 +A1:2009 Reaktion auf Feuer - Réaction au feu - Reacción al fuego - Reactie op vuur	-	B-s2,d0	-	-	-

Slitting on request - Schneiden auf Anfrage - Tronçonnage sur demande - Cortar bajo pedido - Snijden op aanvraag

Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. Certain colours may contain substances (lead pigments) which fall under the Annex XIV of the Reach Regulation 1907/2006/CE. In order to know which colours fall under this annex, please contact Sioen. Upon request those substances can be eliminated from the product. Other colours are available on demand.



Textile Solution Provider - Go to www.sioentextiletextiles.com for more information.
Fabriekstraat 23 - 8850 Ardoorie - Belgium - +32 (0) 51 740 900 - info@sioen.com - www.sioen.com



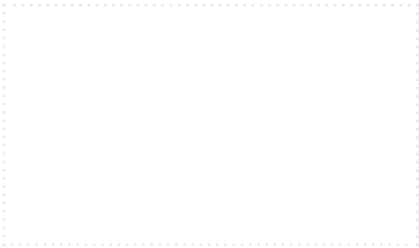
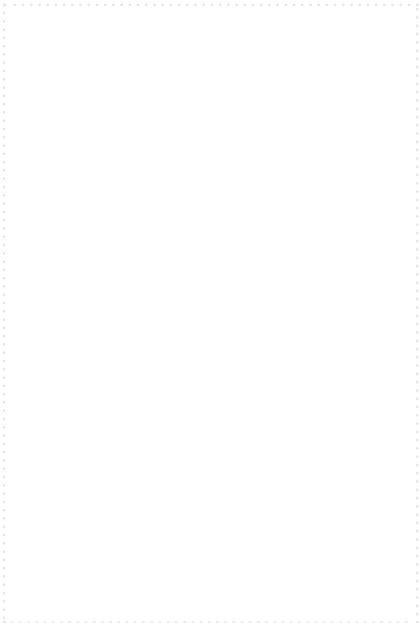
SIDE CURTAINS

B6000 - B6134 - P6819 - P6825 - P6850

- The worldwide market reference
- Panama weave collection
 - Widest standard colour range on the globe
 - Flame retardant and printable options

P6819

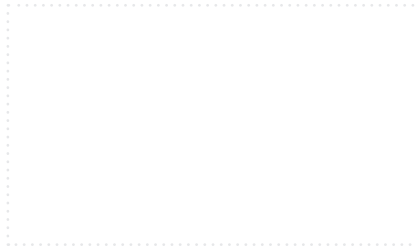
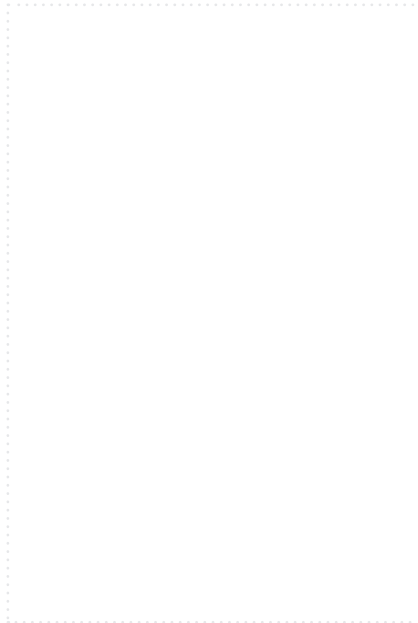
Print quality
Printed, with topcoat



9917
300 cm

P6825

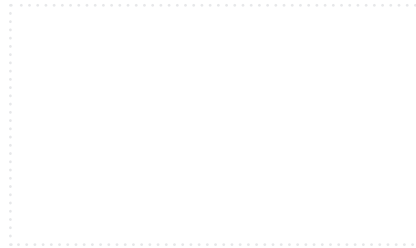
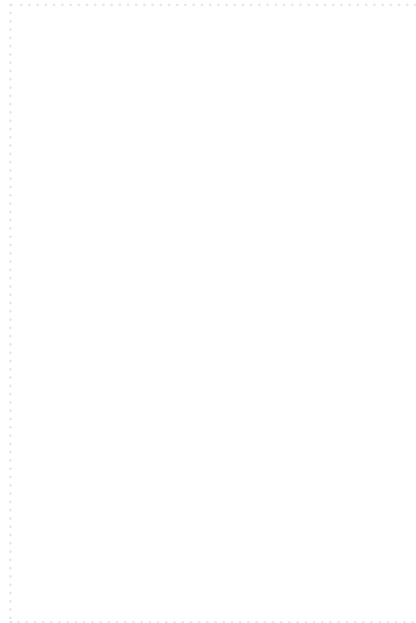
Print quality
Printed, with topcoat



9917
300 cm

P6850

Print quality (Block out)
Printed, with topcoat



9917
300 cm





B6000



Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande - Otros colores bajo pedido - Andere kleuren op aanvraag.



 1001 300 cm	 1003 - RAL 1014 300 cm	 1018 - RAL 1018 300 cm	 1021 - RAL 1021 300 cm	 1024 - RAL 1003 300 cm	 1025 300 cm
 1059 - RAL 1032 300 cm	 1622 300 cm	 1623 300 cm	 3001 300 cm	 3002 300 cm	 3015 - RAL 3002 300 cm, 320 cm
 3016 300 cm	 3017 300 cm	 3018 300 cm	 3021 - RAL 2008 300 cm	 3056 300 cm	 3057 - RAL 4007 300 cm




 3105 300 cm	 5001 300 cm	 5003 - RAL 5012 300 cm	 5004 - RAL 5013 300 cm	 5007 300 cm	 5020 300 cm
 5023 300 cm	 5025 300 cm	 5026 300 cm	 5027 300 cm	 5028 300 cm	 5029 300 cm
 5030 300 cm	 5031 - RAL 5010 300 cm	 5032 300 cm	 5033 300 cm	 5061 300 cm	 5063 - RAL 5002 300 cm
 5104 - RAL 5011 300 cm	 5158 300 cm	 6001 300 cm	 6002 - RAL 6001 300 cm	 6027 - RAL 6018 300 cm	 6028 - RAL 6005 300 cm
 6036 300 cm	 6037 300 cm	 6038 300 cm	 6039 300 cm	 7001 300 cm	 7002 - RAL 7035 300 cm
 7003 300 cm	 7024 300 cm	 7060 300 cm	 7071 300 cm	 7179 300 cm	 7244 - RAL 7043 300 cm
 7340 300 cm	 7500 - RAL 9006 300 cm, 320 cm	 7999 300 cm	 8020 - RAL 8017 300 cm	 9002 285 cm, 300 cm, 320 cm	 9013 - RAL 9010 300 cm



Available width / length for B6000

Verfügbare Breiten & Längen - Largeurs et longueurs disponibles -
Anchos y longitudes disponibles - Beschikbare breedtes & lengtes

colour	code	ral	width (↔)	rolllength (↔)
	1001		300 cm	30 m; 58 m; 224 m
	1003	RAL 1014	300 cm	30 m; 58 m; 224 m
	1018	RAL 1018	300 cm	58 m
	1021	RAL 1021	300 cm	58 m; 224 m
	1024	RAL 1003	300 cm	58 m; 224 m
	1025		300 cm	58 m; 224 m
	1059	RAL 1032	300 cm	58 m; 224 m
	1622		300 cm	58 m
	1623		300 cm	58 m; 224 m
	3001		300 cm	30 m; 58 m; 224 m
	3002		300 cm	58 m; 224 m
	3015	RAL 3002	300 cm	58 m; 224 m
	3016	RAL 3002	320 cm	224 m
	3017		300 cm	58 m; 224 m
	3018		300 cm	58 m; 224 m
	3021	RAL 2008	300 cm	58 m; 224 m
	3056		300 cm	30 m; 58 m
	3057	RAL 4007	300 cm	58 m
	3105		300 cm	58 m
	5001		300 cm	30 m; 58 m; 224 m
	5003	RAL 5012	300 cm	30 m; 58 m; 224 m
	5004	RAL 5013	300 cm	58 m; 224 m
	5007		300 cm	58 m; 224 m
	5020		300 cm	58 m; 224 m
	5023		300 cm	58 m; 224 m
	5025		300 cm	58 m
	5026		300 cm	58 m; 224 m
	5027		300 cm	58 m; 224 m
	5028		300 cm	58 m; 224 m
	5029		300 cm	58 m; 224 m
	5030		300 cm	58 m; 224 m

colour	code	ral	width (↔)	rolllength (↔)
	5031	RAL 5010	300 cm	58 m; 224 m
	5032		300 cm	58 m; 224 m
	5033		300 cm	30 m; 58 m
	5061		300 cm	58 m; 224 m
	5063	RAL 5002	300 cm	58 m; 224 m
	5104	RAL 5011	300 cm	58 m
	5158		300 cm	58 m; 224 m
	6001		300 cm	30 m; 58 m; 224 m
	6002	RAL 6001	300 cm	58 m; 224 m
	6027	RAL 6018	300 cm	30 m; 58 m; 224 m
	6028	RAL 6005	300 cm	58 m; 224 m
	6036		300 cm	58 m; 224 m
	6037		300 cm	58 m; 224 m
	6038		300 cm	58 m; 224 m
	6039		300 cm	58 m; 224 m
	7001		300 cm	58 m
	7002	RAL 7035	300 cm	58 m; 224 m
	7003		300 cm	30 m; 58 m; 224 m
	7024		300 cm	30 m; 58 m; 224 m
	7060		300 cm	58 m; 224 m
	7071		300 cm	58 m; 224 m
	7179		300 cm	58 m
	7244	RAL 7043	300 cm	58 m
	7340		300 cm	58 m
	7500	RAL 9006	300 cm	30 m; 58 m; 224 m
	7500	RAL 9006	320 cm	58 m; 224 m
	7999		300 cm	30 m; 58 m; 224 m
	8020	RAL 8017	300 cm	58 m
	9002		285 cm	58 m
	9002		300 cm	30 m; 58 m; 224 m
	9002		320 cm	58 m; 224 m
	9013	RAL 9010	300 cm	58 m; 224 m

Slitting on request - Schneiden auf Anfrage - Tronçonnage sur demande - Cortar bajo pedido - Snijden op aanvraag