


# B9000

Truck cover



Other colours on request - Andere Farben auf Anfrage - Autres coloris sur demande - Otros colores bajo pedido - Andere kleuren op aanvraag.

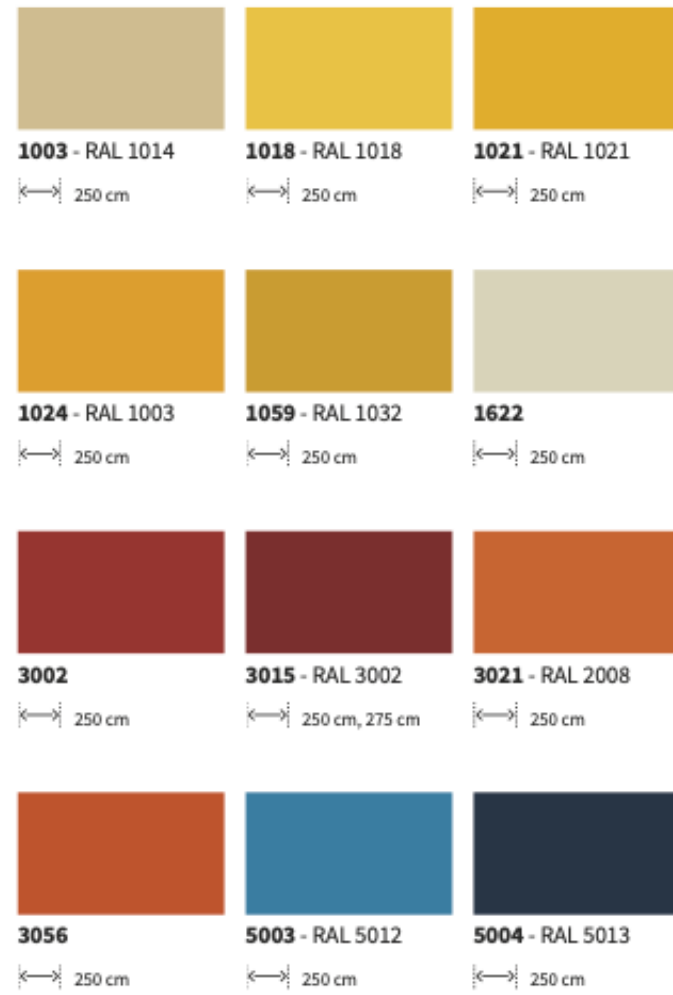

# Technical specifications

Technische Daten - Données techniques - Datos técnicos - Technische specificaties

	B7000	B7808	B7014	B7119	B8000	B9000	P9700
	Flat tarpaulin	Flame retardant	Economy Tarp	Multi-purpose use	Truck cover	Truck cover	Print quality
<b>Total Weight</b> - DIN ISO 2286/2:1998 Gesamtgewicht - Poids total - Peso total - Totaal gewicht	550 g/m <sup>2</sup>	600 g/m <sup>2</sup>	570 g/m <sup>2</sup>	630 g/m <sup>2</sup>	630 g/m <sup>2</sup>	680 g/m <sup>2</sup>	700 g/m <sup>2</sup>
<b>Composition</b> Zusammensetzung - Composition - Composición - Samenstelling	PES + PVC	PES + PVC	PES + PVC	PES + PVC	PES + PVC	PES + PVC	PES + PVC
<b>Fabric (Warp / Weft)</b> - DIN ISO 2060:1994 Gewebe - Tissu - Tejido - Weefsel	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex
<b>Lacquering</b> Lackierung - Laquage - Tipo lacado - Lacquering	-	Bottom: glossy	Top: dull Bottom: glossy	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	Top: semi dull Bottom: glossy
<b>Breaking Strength (Warp / Weft)</b> - EN ISO 1421/2:1998 Höchstzugkraft - Résistance rupture - Resistencia urdimbre - Treksterkte	2500 N/5cm 1800 N/5cm	2500 N/5cm 1800 N/5cm	2500 N/5cm 1800 N/5cm	2500 N/5cm 1800 N/5cm	2500 N/5cm 2300 N/5cm	3000 N/5cm 2850 N/5cm	3000 N/5cm 2850 N/5cm
<b>Tear Strength (Warp / Weft)</b> - DIN 53363:2003 Weiterreisskraft - Résistance à la déchirure - Resistencia urdimbre - Scheurweerstand	250 N 250 N	250 N 250 N	250 N 250 N	250 N 250 N	270 N 270 N	300 N 300 N	300 N 300 N
<b>Adhesion</b> - EN ISO 2411:2000 Haftung - Adhérence - Adhesión - Hechting	90 N/5cm	90 N/5cm	90 N/5cm	90 N/5cm	90 N/5cm	100 N/5cm	100 N/5cm
<b>Temperature Resistance</b> - EN 1876/1:1998 Temperatuursbeständigheid - Tenue à la température - Resistencia térmica - Temperatuursbestendigheids	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C	-40/+70 °C
<b>Light Fastness</b> - ISO 105 B02:2014 Lichtechtheid - Tenue à la lumière - Solidez color - Lichtechtheid	7-8	7-8	7-8	7-8	7-8	7-8	7-8
<b>Fire Behaviour</b> Brennverhalten - Reaction au feu - Resistencia al fuego - Brandgedrag	ISO 3795 1989 < 100 mm/min	NF P 92 507 2004 M2	ISO 3795 1989 < 100 mm/min	ISO 3795 1989 < 100 mm/min	ISO 3795 1989 < 100 mm/min	ISO 3795 1989 < 100 mm/min	ISO 3795 1989 < 100 mm/min

Slitting on request - Schneiden auf Anfrage - Tronçonnage sur demande - Cortar bajo pedido - Snijden op aanvraag

Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. Certain colours may contain substances (lead pigments) which fall under the Annex XIV of the Reach Regulation 1907/2006/CE. In order to know which colours fall under this annex, please contact Sioen. Upon request those substances can be eliminated from the product. Other colours are available on demand.

